

## HSIP West Carrillo Lighting and Signal Improvement Project

### City News In Brief Submittal

#### Safety Improvements Project on West Carrillo Street

On September 13, 2021 work will begin on a safety improvement project along Carrillo Street, from Chapala Street to Miramonte Drive. The project work includes installing roadway lighting, reconstructing a traffic signal, installing a new enhanced pedestrian crossing, roadway resurfacing, sidewalks and adding new ADA compliant ramps.

Roadway resurfacing will be done on weekends to minimize impact on traffic. For phases 1 through 3, traffic will be closed in one direction through the limits of the phase, and for phase 4 and 5, traffic will be shifted over and reduced to a one-lane road in both directions.

The lighting work will occur concurrently with the phased work.

This project completion is scheduled for February 2022. During this time, the City will ensure that the Contractor provides traffic and pedestrian detours. These detours will be provided only for the locations along the project corridor being affected by roadwork and for the duration of that work.

We appreciate the public's cooperation and apologize for any inconvenience.

The construction phases are outlined below and construction is expected to begin with sidewalk/ramp Phases 1A/1B.

#### Sidewalks and Ramps


Phase 1A*	Phase 1B**	Phase 2
Intersections along Carrillo, east of the freeway	Intersection of Carrillo & San Pascual	Intersection of Carrillo and San Andres
Work includes: <ul style="list-style-type: none"><li>- Reconstructing ADA access ramps</li><li>- Install underground infrastructure for new intersection lighting</li><li>- Reconstruct an existing bus pocket</li></ul>	Work includes: <ul style="list-style-type: none"><li>- Install median island, crosswalk, and rapid flashing beacon</li><li>- Remove &amp; replace sidewalk sections</li><li>- Construct new curb &amp; gutter</li><li>- Install new ADA access ramps</li></ul>	Work includes: <ul style="list-style-type: none"><li>- Upgrade traffic signals and poles</li><li>- Remove &amp; replace sidewalk sections</li><li>- Construct new curb &amp; gutter</li><li>- Install new ADA access ramps</li></ul>

\*Roadway resurfacing east of the freeway is expected to occur after phase 1A is completed

\*\*Phase 1B may occur concurrently with Phase 1A



Phase 1B Project Location – Intersection of Carrillo Street and San Pascual Street.

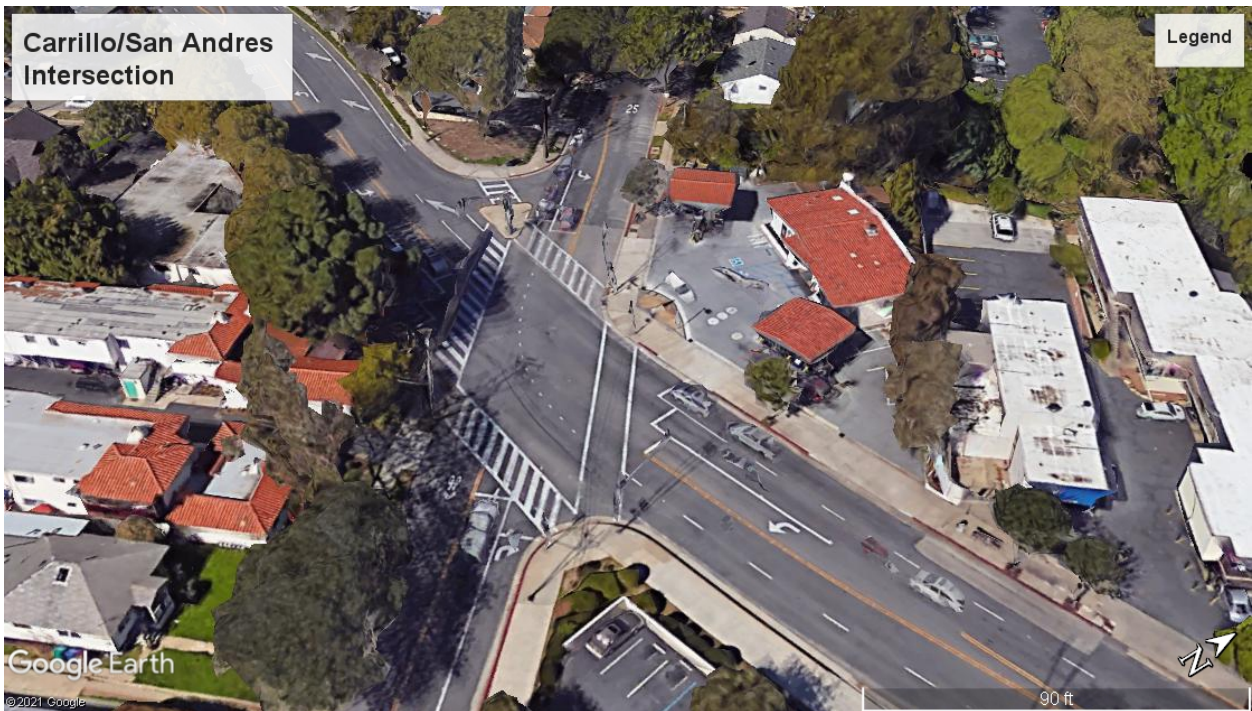

Phase 2 Project Location – Intersection of Carrillo Street and San Andres Street.

**Roadway Resurfacing (Grind & Overlay Pavement) – Weekend Work\***

Phase A	Phase B	Phase C	Phase D	Phase E
Chapala St. to De La Vina St.	De La Vina St. to Bath St.	Bath St. to 101 NB on-ramp	101 SB off-ramp to San Andres St	San Andres St. to Figueroa St.
All work phases involve grinding 4 inches of existing pavement and replacing with 4 inches of Hot Mix Asphalt (HMA) to improve pavement surface quality.				

\*Phase sequencing has not yet been finalized. More information related to the scheduling of this work will be released in advance of this work occurring.